



Broan Elite RM52000 Series

This model combines graceful curves and traditional European styling. The RM52000 Series is engineered to meet the requirements of today's highly styled, conventional appliances and kitchens.


- Multi-speed slide control.
- Includes two 20-watt halogen bulbs.
- Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.
- Dishwasher-safe aluminum filters feature a quick-release latch and professional-style appearance.
- Ducted/non-ducted telescopic flue fits 8' to 9' ceilings.
- Optional flue extension for 10' ceiling is also available.
- Non-ducted kit for indoor recirculation (purchase separately).

SPECIFICATIONS

WIDTH	STAINLESS STEEL	VOLTS	AMPS	CFM Max/Min	SONES Max/Min	DUCT
30"	RM523004	120	3.1	370	7.0	6" round
36"	RM523604	120	3.1	370	7.0	6" round
42"	RM524204	120	3.1	370	7.0	6" round

OPTIONS

RFX5204	Flue Extension 10' ceiling
RRK51	Non-Ducted Kit
FILTERSQUARE	Replacement Charcoal Filter
B08087294	Replacement Aluminum Filter
ARP6	Air flow reducer (limits the airflow of the hood under 300 CFM)

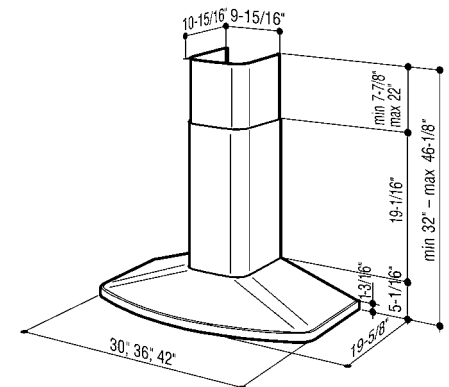


8742885 09/09

SPECIFICATIONS

MODEL	RM52000 SERIES
VOLTS	120 VAC
Hz	60
AMPS	3.1
CFM	370*
SONES	7.0
DUCTING SIZE	6" ROUND
2 HALOGEN BULBS	TYPE T4, 20 W, 12 V
WARRANTY	1 YEAR


*OPTIONAL ARP6 AIR FLOW REDUCER
(LIMITS THE AIRFLOW OF THE HOOD UNDER 300 CFM).

DIMENSIONS

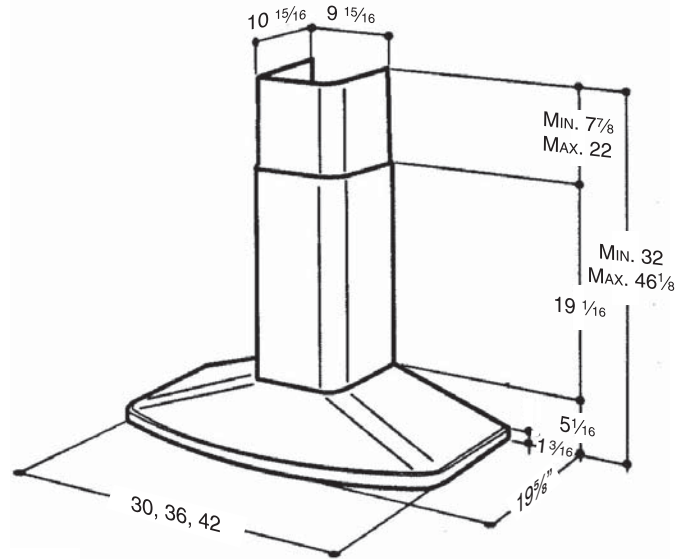

NOTE: DIMENSIONS SHOWN ARE IN INCHES.

AIR FLOW PERFORMANCE

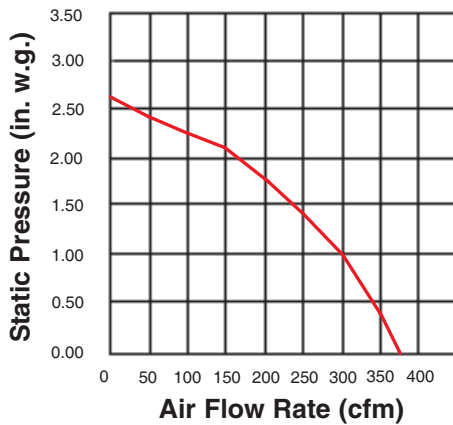

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



BROAN-NU-TONE CANADA INC., MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

PROJECT	REMARKS
LOCATION	
MODEL No.	
QTY.	
SUBMITTED BY	
DATE	